



LED ULTRA SLIM X-RAY ILLUMINATORS - DESKTOP AND WALL

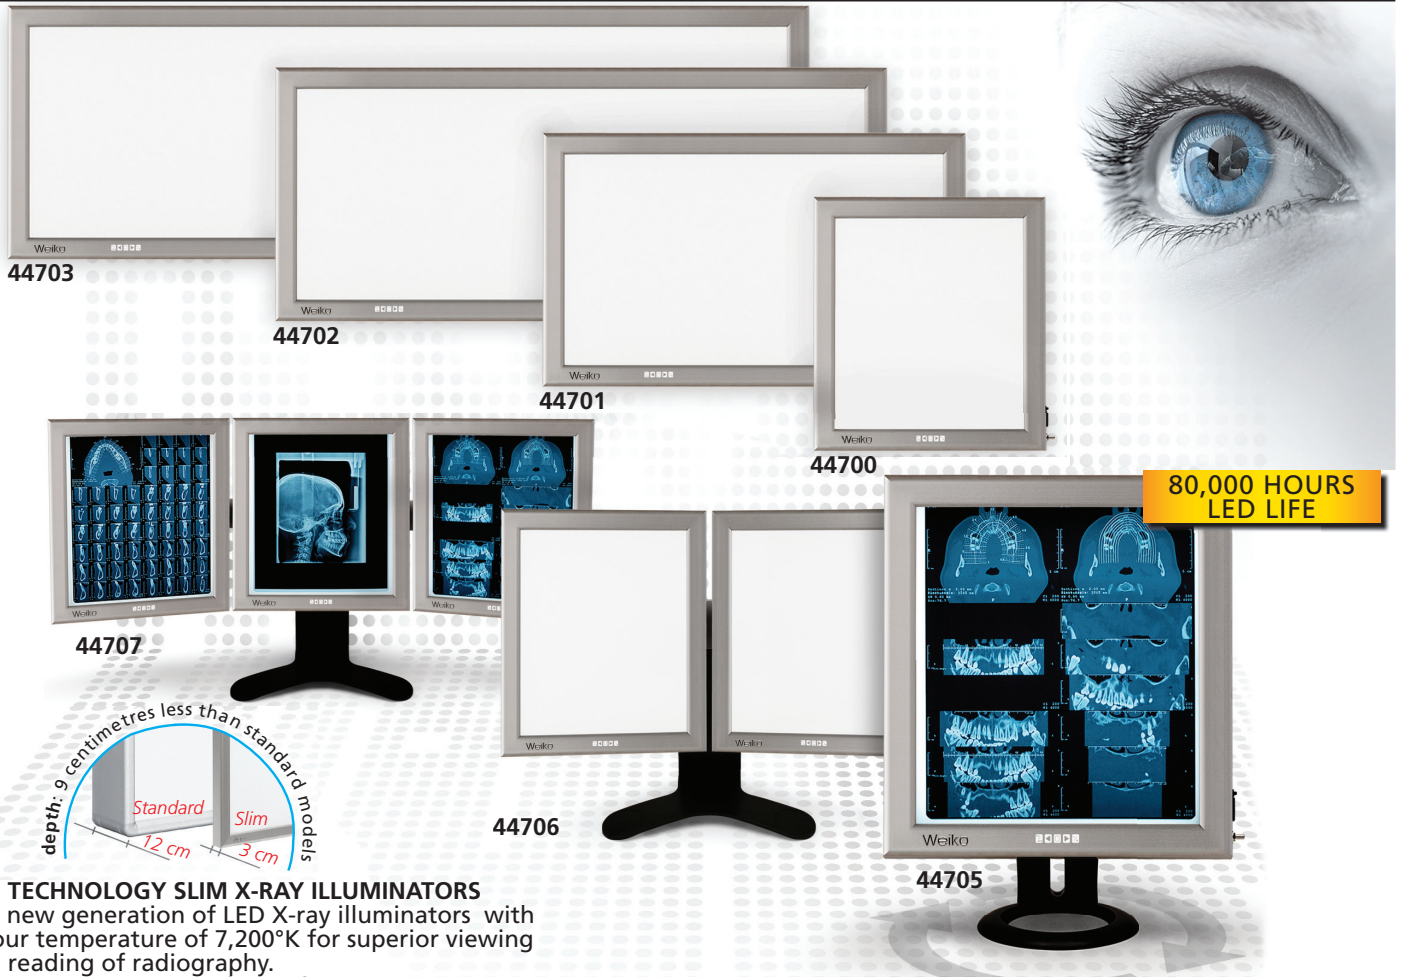


LED TECHNOLOGY SLIM X-RAY ILLUMINATORS


The new generation of LED X-ray illuminators with colour temperature of 7,200°K for superior viewing and reading of radiography. Complete elimination of light flickering and 3,500 cd/mq luminance for more uniform light diffusion. Frame in antiscratch anodized aluminium. Film gripping system incorporated. Dimmer for luminance adjustment from 30% to 100%. - FAS: automatic switching on/off at the positioning/removal of the film. Economic advantages:
 - LED life 80,000 hours, with low maintenance costs
 - low energy consumption compliant with European law
 Double support for horizontal or vertical wall mounting or desktop.

Fully adjustable desktop model:

- Position of panel can be totally adjusted:
- height adjustment 13 cm
- inclination 35° (+25°/-5°)
- vertical or horizontal positioning (44705 only)
- horizontal rotation 10° (270° for 44705 only)



PANELS ADJUSTMENT

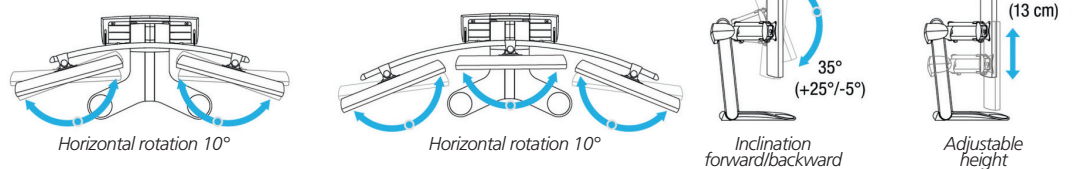

| GIMA code | WALL LED SLIM VIEWERS viewing area | External size | | | Weight kg | Switches | Types |
|-----------|---------------------------------------|---------------|--------|-------|-----------|----------|----------|
| | | Length | Height | Depth | | | |
| 44700 | Light box 42x36 cm | 46 | 50.5 | 3 | 4 | 1 | 1 panel |
| 44701 | Light box 42x72 cm | 82 | 50.5 | 3 | 8 | 1 | 2 panels |
| 44702 | Light box 42x108 cm | 118 | 50.5 | 3 | 12 | 1 | 3 panels |
| 44703 | Light box 42x144 cm | 154 | 50.5 | 3 | 16 | 1 | 4 panels |
| GIMA code | DESKTOP LED SLIM VIEWERS viewing area | External size | | | Weight kg | Switches | Types |
| | | Length | Height | Depth | | | |
| 44705 | Light box 42x36 cm x1 | 46x1 | 50.5 | 3 | 6 | 1 | 1 panel |
| 44706 | Light box 42x36 cm x2 | 46x2 | 50.5 | 3 | 20 | 2 | 2 panels |
| 44707 | Light box 42x36 cm x3 | 46x3 | 50.5 | 3 | 26 | 3 | 3 panels |

TECHNICAL SPECIFICATIONS

Colour temperature: Cool white 7,200°K
 Power supply: 230 V - 50/60 Hz
 Conformity to Low Voltage Directive 2006/95/CE
 Conformity to Electro Magnetic compatibility 2004/108/CE
 Conformity to EEC directive 2007/47 medical Device Class I
 All components UL, DVE, IMQ approved

Brightness: 3,500 cd/m²
 LED life: 80,000 hours

Made in Italy

LED ULTRA SLIM OPTOMETRIC CHARTS

LED ULTRA SLIM OPTOMETRIC CHARTS

New generation of optometric charts with same specifications as above X-ray illuminators. Made in Italy.

| GIMA code | LED ULTRA SLIM OPTOMETRIC CHARTS - WALL | | |
|-----------|-----------------------------------------|---------------|------------|
| | Viewing area | External size | |
| 44710 | Armagnac - 5 m | 25.5x63 cm | 34x72x4 cm |
| 44711 | Monoyer - 3 m | 25.5x63 cm | 34x72x4 cm |
| 44712 | Mixed decimal - 3m | 25.5x63 cm | 34x72x4 cm |
| 44713 | Children - 3 m | 25.5x63 cm | 34x72x4 cm |

